



e-ISSN: 2319-8753 | p-ISSN: 2347-6710

IJRSET

International Journal of Innovative Research in
SCIENCE | ENGINEERING | TECHNOLOGY



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 12, Issue 10, October 2023

ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA

Impact Factor: 8.423

9940 572 462

6381 907 438

ijirset@gmail.com

www.ijirset.com

Impact of Various Materials on the Physical Properties of Concrete, Along with Curing Methods

Smruti Harne¹, Durvas Dehankar², Asma Syed³, Samyak Awathare⁴, Pradnya Tayade⁵,
Pranav Kundalwal⁶, Prof. N. B. Kothari⁷

UG Student, Department of Civil Engineering, J.D.I.E.T., Yavatmal, Maharashtra, India.¹⁻⁶

Assistant Professor, Degree of Civil Engineering, J.D.I.E.T., Yavatmal, Maharashtra, India.⁷

ABSTRACT: Due to increase of modernity in the structural development, we need more acceleration in construction works for accomplishing the demand of modern civilization. As a result to make the construction more effective and less time consuming, testing the impact of various materials on the concrete, with relative decrease of curing period and comparing the different curing methods, to identify the influence of various materials on physical characteristics such as mechanical toughness and resilience that correspond to increased heat of hydration, so that we can compare the respective concrete that eventually gets cured by different curing techniques to accelerate its setting time in order to make it more durable concrete. The replacement will be done by simultaneously increasing the percentages of the materials like fly ash, quarry dust, steel slag, paper fibres, brick powder, coconut shell by 5% 10% 20% 30% 40% and then comparing them with each other to recognize which would be more effective and cost worthy in order of respective replacement.

KEYWORDS - Curing methods, fly ash, quarry dust, steel slag, paper fibres, brick powder, coconut shell, physical characteristics, replacement

I. INTRODUCTION

In last 2 to 4 decades, concrete technology has been grasping more attention in the different modified affordable in construction with introduction of rapid hardening properties. With the help of IS 10262 which is mainly used in mix design of concrete. The amount of most of the products utilized for the simultaneous partial or fully replacement by different materials will go in increasing manner of testing purpose. Here we are considering the impacts of different materials on the concrete to enhance the physical characteristics of the concrete with the allowable replacement. For the intended performances and durability requirements it is essential to concrete structures get properly cured, and to ensure the physical characteristics of the involved materials the respective testing of the materials getting ready with means of curing techniques. Internal curing impacts of physical characteristics on the concrete, as it is more impactful in order to make the concrete less time consuming, as the construction day by day increasing to its peak due to which it is more reliable and is the very much admiring process which can produce additional moisture content in concrete in order to reach that satisfying heat of hydration. Curing provides the curing agents which will be acting as a source of water in the concrete structure which can ultimately lead to proper curing testing. Here we are not only testing the concrete but also comparing the different curing methods to introduce more effective as well as productive product of quicker setting concrete. Concrete plays the key role in the construction practices likewise it has the property of self-curing. At low cement concentration due to comparatively higher water to cement ratio good workability and finish-ability in the normal strength concrete can be easily obtained. Hence performance of concrete which ultimately depends upon the number of criteria for the increase of life span of the structure it is crucial to mark the corrected curing methods.

1.1 Need

The main need of determination of the impacts of various materials physical characteristics of the materials on the concrete is much important to ensure or to produce the cost worthy and effective product for the alternative measure over less availability of the materials as the sources are depleting slowly but the construction of modern infrastructure and development of the places needs construction materials, for this to find out the alternative over the



current product it is necessary to identify and recognize the materials impact with the curing. As the world is on its changing phase and more construction needs to make it more effective within a month and for that we are comparing the different curing methods in order to justify the property of quicker setting into the newly produced product after simultaneous partial and fully replacement of the current aerials with the waste products of industries. To develop the modern civilization within a month we need this project to make sure the curing methods would be instantaneous over the mote time consuming construction.

1.2 Objectives

1. To compare the physical characteristics of concrete by partially replacing the cement and sand.
2. To perform different curing methods on the concrete cubes to determine its compressive strength.
3. To increase heat of hydration by adding quarry dust so that it can be used in Water retaining structure.
4. To study the provision of IS Code 456: 2000 and IS 516: 1959.
5. To study for the purpose of making cost efficient high strength performance concrete.
6. To increase the use of waste material by considering environmental factor.
7. To give high strength and high workability of concrete by replacing cement and sand.
8. To give early age strength with the help of accelerated curing.

II. LITRATURE REVIEW

2.1 Strength characteristics by partial replacement of cement by brick powder.

Sanjay Raj, Preeti D B, Anil kumar, Akshay Mangraj

The research paper shows that the author has used brick powder as partial substituent of cement with varying percentage of 0%, 5%, 10%, 15%, 20%. At 10% & 20% Maximum Compressive strength, Flexural strength & Split tensile strength. The concrete obtained is eco-friendly.

2.2 The strength properties of self-curing concrete with partial replacement of fine aggregates with Quarry Dust.

Muthuraman P, Thangapandi K, R Anuradha.

This paper shows that 25% LWA + 1% PEG gives maximum compressive strength, tensile strength and modulus of rupture For M30 grade of concrete. Flexural behaviour of self-curing concrete is same as conventional concrete. Due increase of PEG, slump value decreases.

2.3 The study on effectiveness of the various curing methods on the on the properties of concrete.

Princy KP, Dr. Elson John (November-15).

In this research paper various Curing Compound are used.

The result obtained after the curing of 7, 14 & 28 days as compared Conventional water curing methodis given in the table :-

Curing Compound	Compressive Strength	Flexural Strength	Splitting Tensile Strength
Water Proofing	Maximum	12% decrease	7% decrease
Wax	99% increase	21% decrease	10% decrease
Acrylic Resin	96% increase	26% decrease	16% decrease

Table no. 0.1

2.4 The influence of accelerated curing methods on the properties of concrete.

Saranya KP, Dr. Elson John.

The influence of accelerated curing methods on the properties of concrete In this paper Steam curing, electrical curing, microwave curing, hot water curing and carbonation curing. MW energy for 45 min could improve the greatest 8h early-age compressive strength of the MW-cured. After accelerated carbonation for 4 hours the compressive strength of concrete improves.

2.5 Partial Replacement of sand and cement by fly ash and silica fumes.

Dara Asha Salomi, Hanumanthrao Ch.

Partial Replacement of sand and cement by fly ash and silica fumes In this research paper cement is partially replaced by fly ash and silica fumes with varying percentage of 60% to 20%. It is concluded that using fly ash beyond 50% will decrease the physical properties of concrete. Using 10% & 50% of Fly ash and Silica fume make concrete more strong and durable.

2.6 Curing methods and their effect on strength of concrete.

SS Nuruddeen Usman, Muhammad Nura Isa.

Curing methods and their effects on the strength of concrete

The study shows that the immersion of concrete cube is the most efficient method of curing. One large scale different methods used are

- a. Immersion
- b. Sparkling
- c. Polyethylene Membrane
- d. Sharp sand curing.

It is concluded that Curing by immersion gives best physical properties, but it cannot be used on large scale.

2.7 Mechanical Properties of Light Weight Aggregate Concrete Using Pumice as a Coarse Aggregate.


Hayder Kadhem Adai Al-Farttoosi*, Oday A. Abdulrazzaq, and Haleem K.Hussain.

Mechanical Properties of Light Weight Aggregate Concrete Using Pumice as a Coarse Aggregate

As the percentage of Pumice Increases there will variations such in :-

- i. Compressive strength decreases
- ii. Equilibrium density decreases
- iii. Split tensile strength increases
- iv. Water cement ratio increases
- v. Modulus of rupture increases

CHAPTER 3- PROPOSED METHODOLOGY

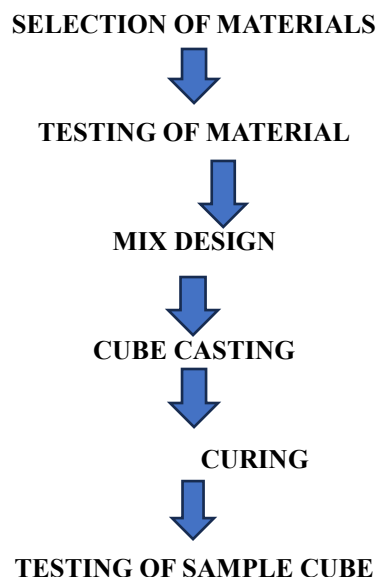

3.1 SELECTION OF MATERIALS

Selection of materials can be done on the basis of their physical properties.

Following table gives the perfect values of the materials properties :-

Sr. No.	Properties	Fly ash	Brick Powder	Steel Slag	Sand
1.	Specific Gravity	2.07	2.17	2.63	2.48
2.	Bulk Density	1100 – 1200 kg/m ³	1657 kg/m ³	1620 kg/m ³	1530 kg/m ³
3.	Water Absorption	12.11 – 7.84%	-	19.13%	22.05%
4.	Fineness	290 m ² /kg	-	3.55 m ² /kg	2.59 m ² /kg
5.	Colour	Light grey	Redish Brown	-	-

Table no.1 properties of materials

DIFFERENT MATERIALS USED WHILE REPLACEMENT OF CEMENT AND SAND :-

- 1) Fly Ash :- It is waste product of coal industry. It is also called as coal ash or pulverized fuel ash is a coal combustion product. As it is the combustion of coal finely divide residue which is used to increase the durability and workability of the concrete along with reduction of permeability.



Fig. 01

- 2) Brick Powder :- As the bricks are made up of clay and has extreme fire resistant properties, also contributes to binding of material with each other. We can use brick powder is replacement for cement.



Fig. 02

- 3) Quarry Dust :- It was made using natural aggregates of volcanic origin such as Pumice, Scoria, etc. Concrete is mostly known as grey material with good mechanical strength. In the activities of quarrying there is a crushing of the rock has been occurred by which dust forms and that dust have the properties similar to the aggregates.



Fig. 03

- 4) Coconut Shell Powder :- It is also the waste product of industrial same as fly ash it is more reliable and impactful to increase the durability of the concrete with regards to reduction of permeability.



Fig. 04

- 5) Steel Slag :- Slag of iron and steel used as aggregates for asphalt roads can be recovered as by-products. The steel slag is a residue of the production process of steel. The slag is mainly composed by: silica, alumina, titanium, iron sand and combinations of calcium and magnesium oxides.



Fig. 05

3.2 TESTING OF MATERIALS :-

There are several types of concrete testing methods used to access the quality and performance of concrete. The testes performed on concrete are as follows:

1. Workability Test

It is also known as the slump test in which we identify the workability of the concrete. It is performed to identify the property i.e. Workability of the concrete.

The concrete workability is the working of material with concrete property. The phrase 'working properties of concrete' non-exhaustively preparation of concrete include placing, compaction mixing and transportation.

2. Slump Test

Slump test is the another type of workability test with the slump cone. A conical frustum having diameter of base 200 mm, top up diameter 100 mm and height of 300 mm known as conical slump test. The most common type of identifying the workability of concrete at the site. Even though, it is widely accepted yet the results not fully satisfied.

3. Compaction Factor Test

The accurately workable material is tested by falling it from height. The apparatus is made up to two hoppers on each other and at the bottom a cylinder is fitted. Every hopper is fixed with trap door at the bottom.

This method is performed by the specifications of compaction factor test by IS code is given below: - IS 1199:1959 sampling and analysis of concrete.

4. Permeability Test

Property of concrete in which it allows to flow water from it. The water absorption test of concrete should not be confused with permeability test of concrete.

5. Importance of Concrete Setting Tests

Due to the water in the concrete reinforcement gets corroded. It is known that as volume get increased due to its corrosion and formation of cracks on steel due to its absorption property of water of the concrete. Hence, the permeable concrete will be suitable in order to avoid the cracks and fast corrosion of reinforcement. Therefore, it is so vital to check the setting test of the concrete.

3.3 MIX DESIGN :-

- 1) IS 10262 is usually used for the mix design for controlled concrete and we are using the mix designing proportions of materials like cement and sand mixtures with the newly replaceable materials.
- 2) As a result, we are using and then comparing the control concrete proportions of the materials with the newly replaceable waste products, likewise we are having the different ratio proportions and testing it by IS specifications.
- 3) To find right mix proportion we have to go through different laboratory as well as on field mixing test, calculations and all the examination so that after mixing it won't get spoiled.
- 4) Concrete mix designing is the process of finding accurate proportions of cement, sand and aggregates.
- 5) Most of the times it would be easier to adopt in the structures those requires higher Grade of concrete.

3.4 CASTING

Casting of the concrete cube is the main part of the research as we are testing as well as finding the comparative strength by differently casted cubes of concrete.

We are casting cubs firstly of controlled concrete, then we are casting the cubes of fly ash, brick powder, steel slag replaced materials.

After casting these cubes, we are keeping it for the rest for different curing periods as it would be our test while it get settled.

Like

Sr. No.	Description of cubes	Differently Cured Cubes		
		Normal	Accelerated	Chemical
1.	Controlled Concrete	3	3	3
2.	Fly Ash	3	3	3
3.	Fly ash + Steel slag	3	3	3
4.	Brick Powder	3	3	3

Table 02. Number of Required Cubes to be Casted

3.5 CURING

It is the process of attaining the moisture in the concrete and with proper temperature range as a result the concrete should get the perfect heat of hydration. And heat of hydration is the Chemical process of concrete curing between cement and water which will be resulting in the formation of settling of concrete as well as rapid and quick hardening. And here we are comparing and testing three different curing methods,

i.e.1) Control curing

2) Accelerated or Temperature curing

3) Chemical curing

IV. DESIRED OUTCOMES

1. Increase the physical properties of concrete after partial replacement of cement and sand.
2. Repurpose of industrial waste, which leads to more sustainable and ecofriendly concrete.
3. Reduction of consumption of natural resources by replacing them with industrial waste material.
4. Meeting the desire strength, durability and workability by replacing the constituents of concrete.
5. Rise of heat of hydration after adding quarry dust so that it can be used in water retaining structure.
6. Achieving cost reduction by using waste materials as a substitute of cement and sand.
7. Accelerated curing desire to considerably reduce the time required for curing, allow for quicker formwork removal.
8. Accelerated curing method aims to gives early age strength.

REFERENCES

1. Sanjay Raj, Preeti D B, Anil kumar, Akshay Mangraj, "Strength characteristics by partial replacement of cement by brick powder" Indian journal of Civil material & Environmental Science, Volume 11, Number 1, January-June 2023.
2. Muthuraman P, Thangapandi K, R Anuradha, "The strength properties of self curing concrete with partial replacement of fine aggregates with Quarry Dust" ISSN 0974-6528, Volume.13 No.2 (April 2020).
3. Princy KP, Dr. Elson John (November-15), "The study on effectiveness of the various curing methods on the properties of concrete" ISSN0974-6528, Vol.13 No.2 (April 2020).
4. Saranya KP, Dr. Elson John, "The influence of accelerated curing methods on the properties of concrete" International journal of Engineering Research and Technology, ISSN 2278- 0181, Vol. 4 Issue 11 Nov.2015.
5. Dara Asha Salomi, HanumanthraoCh, "Partial Replacement of sand and cement by fly ash and silica fumes" Vol.83, Issue March-April 2020.
6. Hui Wei, Tao Wu and Xue Yang, " Properties of Lightweight Aggregate concrete reinforced with carbon and polyethylene fibers" Issue on 31 January 2020.
7. S Nuruddeen Usman, Muhammad Nura Isa, "Curing methods and their effects on the strength of concrete" Issued on July 2015.



8. Hayder Kadhem Adai Al-Farttoosi¹, Oday A. Abdulrazzaq, and Haleem K. Hussain, “Mechanical Properties of Light Weight Aggregate Concrete Using Pumice as a Coarse Aggregate” Issued on 2020 by ICEST.
9. Francois de Larrard & Thierry Sedran, “Mixture-proportioning of high-performance concrete” Issued on 2002.
10. Fahrizal Zulkarnain & Mahyuddin Ramli, “Durability Performance of Lightweight Aggregate Concrete For Housing Construction” Issued on 2008.



INNO SPACE
SJIF Scientific Journal Impact Factor
Impact Factor: 8.423



ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

 **9940 572 462**  **6381 907 438**  **ijirset@gmail.com**



www.ijirset.com

Scan to save the contact details