

Design and Analysis of Polymer PEK Spur Gear under Static Loading Condition Using FEA

Amol C Dhomse¹, R.K.Agrawal²

P.G. Student, Department of Mechanical Engineering, YTIET, University of Mumbai, Maharashtra, India¹

Professor, Department of Mechanical Engineering, YTCEM, University of Mumbai, Maharashtra, India²

ABSTRACT: This work presents the design and Analysis of polymer PEK spur gear and Comparison of results of PEK with Metallic Cast Iron under limited loading conditions. Application of Plastic gear reduces the weight and noise, vibration. Analytical Method is used to calculate Tooth load with help of Lewis equation & dynamic tooth load with help of Buckingham equation. Gear profile modelling is done by using Solidworks 2015. Finite Element Method is used for Static analysis of the gear to find the Von-mises stress on the tooth of the gear using ANSYS and these values are compared with Analytical values.

KEYWORDS: Gear Profile, Solidworks 2015, Finite element Method, ANSYS.

I. INTRODUCTION

Due to High strength to weight ratio and Low noise vibration, High Corrosion resistant and Low maintenance Plastic gear finding their application in every industries. Polymer Ether Ketone is a family of plastic material available.

PEK material will be considered as most superior polymer material even over existing PEEK material. It could well lead to more than 70% weight reduction, more than 3 db of noise reduction and more than 80% reduction in moment of inertia when used as gear material over standard metal materials commonly used in gear industry.

PEK has more resistance to high pressure water and steam, higher melting point temperature and glass transition temperatures as against PEEK. Besides, Strength, wear and thermal properties of PEK makes it perfect replacement of PEEK material.

Existing applications of PEEK material, mainly in aerospace, surgical implants, oil and gas filters and gears are all set for usage of PEK as substitute for better results. PEK applications can even be 3-d printed using SLS.

In this paper following two materials are considered and analyzed for loading conditions.

1. PEK
2. Cast iron

PEK: Ultra-high Performance Thermoplastic (Poly Ether Ketone) material, virgin, semi crystalline granules suitable for injection molding, easy flow, Beige in color. Application Areas: Suitable for high temperature application, high wear & abrasion resistance, high chemical resistance & for metal to plastics conversion etc.

Cast Iron: Cast iron is a group of [iron-carbon alloys](#) with a [carbon](#) content greater than 2%. The alloy constituents affect its color when fractured: white cast iron has [carbide](#) impurities which allow cracks to pass straight through. [Grey cast iron](#) has graphite flakes which deflect a passing crack and initiate countless new cracks as the material breaks.

II. GEAR DESIGN

Gears are defined as toothed wheel used for transmitting both motion and power from one shaft to another shaft by successive engagement of teeth.

Gears are mainly classified

A. According to the position of axes of shaft

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 2, February 2016

1. Parallel
2. Intersecting
3. Non-intersecting and non-parallel
 - B. According to peripheral velocity of gears
 1. Low
 2. Medium
 3. High
 - C. According to type of gearing
 1. External
 2. Internal
 3. Rack and pinion

BASIC PARAMETERS OF SPUR GEAR

GEAR NOMENCLATURE

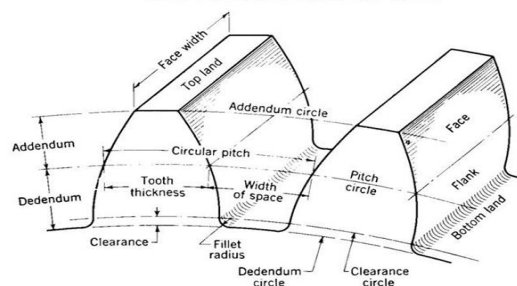


Fig 1. Gear Nomenclature

- Module: It is the ratio of the pitch circle diameter in millimeter to the number of teeth.
- Addendum: It is the radial distance of a tooth from the pitch circle to the top of the tooth.
- Dedendum: It is the radial distance of a tooth from the pitch circle to the bottom of the tooth.
- Tooth Thickness: The thickness of the tooth along the pitch circle is called the tooth thickness.
- Face width: It is the width of gear tooth measured parallel to its axis.
- Pressure Angle: The angle between the line joining the centers of the two gears and the common tangent to the base circles.

SPUR GEAR TOOTH PROFILE DESIGN

1. Consider a Gear made of
2. Module (m) = 4,
3. Number of Teeth (Z) = 18
4. Pressure Angle (α) = 20°
5. Other Tooth parameters are calculated by Involute teeth standards.
6. Pitch Circle Diameter (D) = module $\times$ Number of Teeth
 $D = 4 \times 18$
7. $D = 72\text{mm}$
8. Circular pitch (C.p) = $P_c = \pi D / T = \pi \times 72 / 18 = 12.568$
9. Diametral pitch (D.P) = $T / D = 18 / 72 = 0.25$
10. Addendum = $m = 4\text{ mm}$
11. Dedendum = $1.25m = 5\text{ mm}$
12. Tooth Thickness = $1.5708m = 6.2832\text{ mm}$
13. Fillet radius = $0.4m = 1.6\text{mm}$
14. Working Depth = $2m = 8\text{ mm}$
15. Whole Depth = $2.25m = 9\text{ mm}$

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 2, February 2016

16. Addendum Circle diameter = $2 \times \text{Addendum} + \text{Pitch Circle Diameter}$
17. = $2 \times 4 + 72$
18. = 80 mm
19. Dedendum Circle Diameter = $\text{Pitch Circle Diameter} - 2 \times \text{Dedendum}$
20. = $72 - 2 \times 5$
21. = 62 mm
22. Clearance Depth = $0.25 \times m = 1\text{mm}$

DESIGNING OF SPUR GEAR

ASSUMPTION:

- 1) Effect of radial load (P_r) which induces compressive stress is neglected.
- 2) Tangential load (P_t) is uniformly distributed over the entire face width.
- 3) The effect of stress concentration is neglected.
- 4) At any time, only one pair of teeth is in contact i.e. contact ratio is 1.
- 5) The tooth is assumed to be cantilever.
- 6) Selecting 20° full Depth involutes' tooth system.

TANGENTIAL TOOTH LOAD CALCULATION:

Considering Gear to transmit power of 10KW rotating with a speed of 500rpm. The following parameters are calculated. Considering factor of safety: FOS=4
Mean velocity is

$$v_m = \frac{\pi D N}{60} = \frac{\pi m z_1 N}{60} = \frac{\pi * 0.004 * 18 * 500}{60} = 1.88 \text{ m/s}$$

Velocity factor is

$$c_v = \frac{3 + v_m}{3} = \frac{3 + 1.88}{3} = 1.627$$

Apply the Lewis equation

$$y_p = \pi \left(0.154 - \frac{0.912}{z_1} \right) = \pi \left(0.154 - \frac{0.912}{18} \right)$$

$$y_p = 0.3246$$

Tangential load is calculated as follows

$$f_s = m * b * y_p * \sigma_b = m * b * y_p * \sigma_y * c_v$$

$$= 84.50 * \sigma_y \quad (N)$$

Bending strength is

$$\sigma_b = \sigma_y * c_v$$

$$= 27.5 * 1.627 = 44.74 \text{ MPa}$$

SR NO	PARAMETERS	YEILD STRENGTH $\sigma_y (MPa)$	BENDING STRENGTH $\sigma_b (MPa)$	TANGENTIAL TOOTH LOAD $f_s (N)$
1.	PEK	110	44.74	2323.75
2.	CAST IRON	140	56.94	2957.5

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 2, February 2016

MODELLING OF SPUR GEAR

Spur gear is modelled in Solidworks 2015 using Parametric Design, so that it can be easily editable as per customer requirement means Customization becomes very easy. Parameters required for parametric designing is as shown below in table. Fig b Modelling of Spur Gear in SOLIDWORKS 2015

Sr. No:	Parameter	Value
1	Module	4
2	Pitch Circle Diameter	72
3	Number of Teeth	18
4	Pressure angle	20°

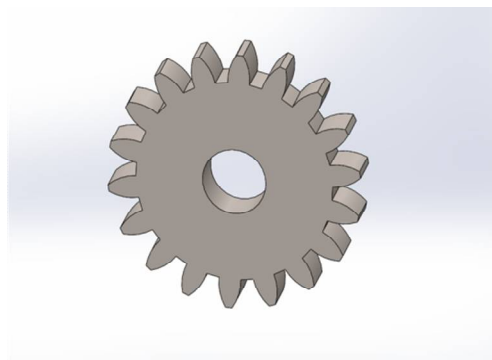


Fig 2. Modelling of Spur Gear in SOLIDWORKS 2015

III. EXPERIMENTAL RESULTS

Finite element analysis of Spur gear is analyzed using ANSYS 14.0. By FEM we calculated the Bending stress produced in the spur gear when it is considered as a cantilever beam subjected to transverse tangential load. Simulation results of spur gear are shown below. Figs. 2 (a) Boundary condition of PEK (b) Different fixed support and forces (c) Meshing of PEK Spur Gear

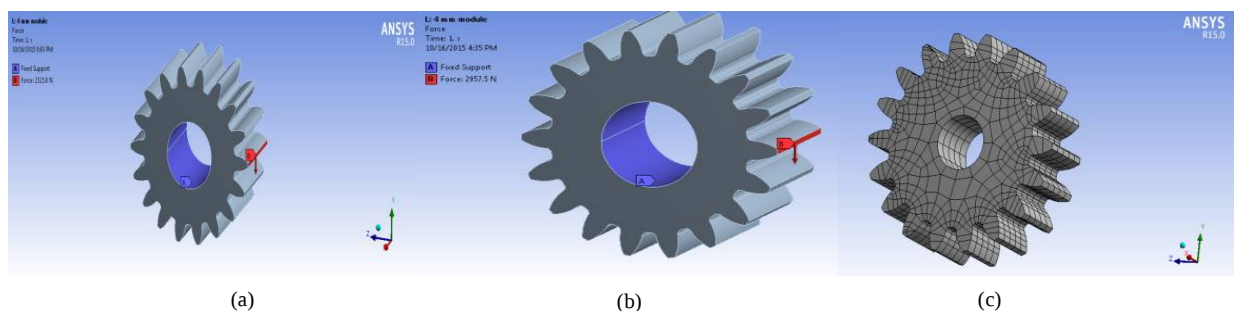


Fig. 3. (a) Boundary condition of PEK (b) Different fixed support and forces (c) Meshing of PEK Spur Gear

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 2, February 2016

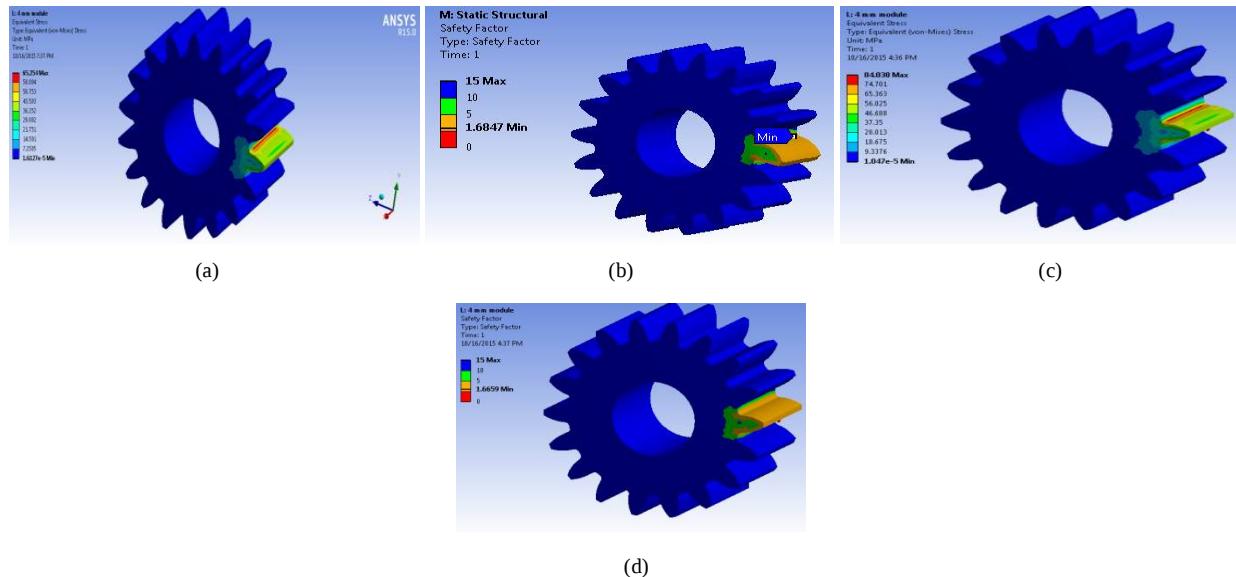


Fig. 4 (a) Von Mises Stress distribution in PEK spur Gear (b) Factor of Safety of PEK (c) Von Mises Stress distribution in Cast Iron spur Gear (d) Factor of Safety of Cast Iron

Finite Element Method results shows that bending stress produced in PEK gear is less as compared to Cast iron Gears. These values are calibrated by analytical method to find the bending stress.

RESULTS

Materials	Von misses Stress, MPa	
	Analytical Stress	FEA Stress
PEK	44.74	65.254
Cast Iron	56.94	84.038

IV. CONCLUSION

Analytical and Finite Element Methods are applied to check the Bending stress produced in the spur gear. The results show that spur gear made from PEK has more bending strength than Cast Iron Spur gear. Also the Density of PEK is also less than the cast iron. So by replacing cast iron Gear by PEK gear we can achieve high strength, Low Weight and Noise free Motion of Gears.

REFERENCES

- [1] Pravin Kumar, Harsh Raghuvanshi, "DESIGN AND ANALYSIS OF SPUR GEAR DIFFERENT GEOMETRIC CONDITIONS", International Journal of Engineering & Advanced Technology (IJEAT), ISSN:2249-8958, Volume-3, Issue-2, December 2013
- [2] Utkarsh.M.Desai, Prof.Dhaval.A.Patel, "MODELING AND STRESS ANALYSIS OF COMPOSITE MATERIAL FOR SPUR GEAR UNDER STATIC LOADING CONDITION", Technical Research Organization India,

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 2, February 2016

- [3] V. Siva Prasad, Syed Altaf Hussain, V.Pandurangadu, K.PalaniKumar, "MODELING AND ANALYSIS OF SPUR GEAR FOR SUGARCANE JUICE MACHINE UNDER STATIC LOAD CONDITION BY USING FEA", International Journal of Modern Engineering Research (IJMER), ISSN: 2249-6645, Volume-2, Issue.4, July-Aug 2012
- [4] Pradeep Kumar Singh¹, Manwendra Gautam¹, Gangasagar¹ and Shyam Bihari Lal "STRESS ANALYSIS SPUR GEAR DESIGN BY USING ANSYS WORKBENCH", International Journal of Mechanical Engineering and Robotics Research, ISSN 2278 – 0149, Vol. 3, No. 3, July 2014
- [5] A. Thirugnanam, J. Sathish and Lenin Rakesh , "CONTACT ANALYSIS OF SPUR GEAR USING COMPOSITE MATERIAL(NYLO CAST)", Middle-East Journal of Scientific Research 20 (3), ISSN 1990-9233,2014
- [6] Maheeb Vohra, Prof. Kevin Vyas, "comparative FINITE ELEMENT ANALYSIS OF METALLIC AND NON-METALLIC SPUR GEAR", IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN: 2278-1684,p-ISSN: 2320-334X, Volume 11, Issue 3 Ver. IV (May- Jun. 2014)
- [7] Amarjeet R. Gupta, "APPLICATION OF DIFFERENT THERMOPLASTIC GEARS IN THE GEARBOX OF MOPED", International Journal for Engineering Applications and Technology (IJFEAT), ISSN: 2321-8134, Issue: 2(1):10Oct,2013
- [8] Sandeep C. Dhaduti¹, Dr. S. G. Sarganachari,"REVIEW OF COMPOSITE ASYMMETRIC SPUR GEAR",International Journal of Engineering Research, ISSN:2319-6890,Volume No.4, Issue No.2,01 Feb. 2015
- [9] A. K. Wood, V. Williams and R. Weidig, "THE RELATIVE PERFORMANCE OF SPUR GEARS MANUFACTURED FROM STEEL AND PEEK", (Reprinted with kind permission of the VDI International Conference on Gears, Technical University of Munich 2010), March/April 2012
- [10] Dr.Ir H.G.H.van Melick, "TOOTH-BENDING EFFECTS IN PLASTIC SPUR GEARS", www.geartechnology.com, September/October 2007
- [11] S. Senthilvelan and R. Gnanamoorthy,"CONDITION MONITORING OF NYLON AND GLASS FILLED NYLON GEARS
- [12] M/s. Kalaikathir Achchagam, Faculty of Mechanical Engineering PSG College of Technology, Coimbatore-641 004 (ISBN 978-81-927355-0-4), 15 MAY, 2013.