

# International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 8, Issue 12, December 2019

## Smart Garbage Monitoring System Using IOT

Miss.Ankita B. Gaikwad<sup>1</sup>, Miss.Pratiksha R. Dombale<sup>2</sup>, Mrs. Jangam D.Y<sup>3</sup>

Student, Department of Computer Engineering, Jayawantrao Sawant Polytechnic Hadapsar, Pune, India<sup>1-2</sup>

Lecturer, Department of Computer Engineering, Jayawantrao Sawant Polytechnic Hadapsar, Pune, India<sup>3</sup>

**ABSTRACT:** The Internet of Things (IoT) shall be able to incorporate transparently and seamlessly a large number of different and heterogeneous end systems, while providing open access to selected subsets of data for the development of a plethora of digital services. Building a general architecture for the IoT is hence a very complex task, mainly because of the extremely large variety of devices, link layer technologies, and services that may be involved in such a system. One of the main concerns with our environment has been solid waste management which in addition to disturbing the balance of the environment also has adverse effects on the health of the society. The detection, monitoring and management of wastes is one of the primary problems of the present era. The traditional way of manually monitoring the wastes in waste bins is a complex, cumbersome process and utilizes more human effort, time and cost which is not compatible with the present day technologies in any way. This an advanced method in which waste management is automated. This project IoT Garbage Monitoring system is a very innovative system which will help to keep the cities clean. This system monitors the garbage bins and informs about the level of garbage collected in the garbage bins via a web page. This web page also send all information to garbage collection vehicles.

**KEYWORDS:** Wi-Fi modem, Arduino microcontroller, Application Resource Manager (ARM), Solids Waste management.

### I. INTRODUCTION

A healthy environment is necessary if you want to stay healthy. Though the world is in the stage of upgradation there is yet another problem that has to be dealt with which is “Garbage”. In most of the places overflowing of garbage bins takes place. This gives rise to various diseases as large number of insects and mosquitoes breed on it. In India the absence of efficient waste management has led to some serious issues, it is a big challenge faced by most of the regions of India. Hence smart garbage monitoring system is a system which can eradicate the problem or can reduce it to the minimum level. Our present prime minister of India Shri Narendra Modiji has introduced the concept of implementing 100 smart cities in India. "Swachh Bharat Abhiyan" was initiated to ensure a clean environment, and the smart garbage monitoring system is going to play a big role in this. We are living in the age where the task and systems are fusing together with the power of IoT to have more efficient system of working and to execute jobs quickly. With all the power at our fingertips that is what we have come up with. The Internet of Things (IoT) shall be able to incorporate transparently and seamlessly a large number of different systems, while providing data for millions of people to use and capitalize. One of the main problem with our environment has been solid waste management which impacts the health and environment of our society.

The detection, monitoring and management of wastes are one of the primary problems of the present era. The traditional way of monitoring the waste bins is a difficult process and utilizes more human effort, time and cost which can easily be avoided. with our present technologies. So we have proposed a method in which waste monitoring is automated. The proposed system is an innovative way that will help to keep the cities clean and healthy.

# International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 8, Issue 12, December 2019

## II. LITURATURE SURVEY

Some of the following garbage type Packaging waste, Agricultural waste, Inorganic waste, Liquid waste etc. In solid waste bin monitoring system garbage bin set the public place then Camera set for garbage bin location. The camera captured image for garbage bin. Radio Frequency Identification (RFID), GPS and GIS send image for work station. The RFID reader and camera are mounted in the truck, when truck comes closer to the bin RFID reader communicated RFID tag. & send all information. The System are use controlling Hut. This Controlling Hut are SMS Technology. The GPS and GPRS mapping server to analyzing data of various location. The control station compiled all the information and stored in the system database. The bin status and waste truck was monitored.

In waste bin monitoring system using zig bee and Global mobile communication system (GSM).The sensors are place in the common garbage bins placed at the public place when the garbage reaches the level of the sensors. Then that indicated will give in indication to the driver by ARM7 they sending SMS using GSM technology. The technology use by Zig bee, Global mobile system (GSM), ARM 7 Controller. The range of communication of the zig bee is almost 50 meter. They use for range GSM Module, analyzing the image we get an idea about level of garbage. The zig bee and GSM system would be able to monitor the solid waste collection process. This technique overcomes some disadvantages which are use of minimum route, low cost, fuel use, clean environment.

The waste management is built around several elements. Waste item, domestic bin, trash bags, collective containers and collecting vehicles. The waste flow starts from the waste item and the domestic bin to end in the collecting vehicles. Use the waste identification for sorting process. Base on RFID technology new trash bag is added in a collective container. The technology use Radio Frequency Identification (RFID), Smart vehicular and Trash Bag. They only identify RFID tags garbage bins, Low data speed, high cost. The zig bee and GSM system would be able to monitor the solid waste collection process. This technique overcomes some disadvantages which are use of minimum route, low cost, fuel use, clean environment.

A single directional cylinder is suspended next to the lid of dustbin. The piston is free to move up and down vertically inside the dustbin to a certain level. A plate is attached to the cylinder for compressing the garbage. The shape of this plate depends upon the shape of the dustbin. The compressing plate consists of a side hole through which the leaf switch is suspended upside down. Technology use Piston, Switch, microcontroller, the single directional cylinder, smart dustbin. Only use for smart dustbins, they are not provide garbage collection. Smart Dustbins can prevent the accumulation of the garbage along the roadside to a great extent thereby controlling the widespread of many diseases. It can prevent pollution and also prevent the consumption of the spread out garbage by the street animals.

A laser diode is a p-n junction diode which produces a narrow beam of light that is intense, focused and coherent. In a LASER diode a mirrored resonant chamber is used to reinforce the light waves so that the light emitted by the device is at a single frequency and of the same phase. A photo detector is a device that converts light signals into electrical signals, which can be amplified and processed. Technology use Dustbins, LASER Diode, Photo Detector Diode, Road Side Units (RSU), and Garbage Collecting Vehicle (GCV).Only support for simulation of Transmission Control Protocol (TCP), routing and multicast protocols over wired. The dynamic routing of GCV compared with static solution is much more efficient and will be much effective when more than one dustbin fills up at the same time. The initial planned route is saved so that when real-time data is received only portion of the planned path may be changed. For the garbage detection, weight sensor can be used. It gives the weight of the garbage in the dustbin. But it doesn't provide any information about the level of the garbage in the dustbin. Hence author used Infrared (IR) sensor for garbage detection. IR sensor radiates light which is invisible to the human eye because it is at infrared wavelengths, but it can be detected by electronic devices. IR transmitter consists of LED which send the IR beam. Technology use Infra-red sensor (IR), Microcontroller, Global

# International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 8, Issue 12, December 2019

System for Mobile (GSM), graphical user interface (GUI). Infrared sensor (IR), Global System for Mobile (GSM). They only use GSM network. Power and internet supply continue on. Smart garbage management system using IR sensor, microcontroller and GSM module. This system assures the cleaning of dustbins soon when the garbage level reaches its maximum.

Arduino is best described as a single-board computer that has deliberately been designed to be used by people who are not experts in electronics, end-Gingering, or programming. It is inexpensive, cross-platform (the Arduino software runs on Windows, Mac OS X, and Linux), and easy to program. Both Arduino hardware and software are open source and extensible. Arduino is also powerful: despite its compact size, it has about as much computing muscle as one of the original navigation computers from the Apollo Programmers, designers, do-it-yourselfers, and artists around the world take advantage of Arduino's power and simplicity to create all sorts of innovative devices, including interactive sensors, artwork, and toys.

### III. OBJECTIVE

- Monitors the garbage bins and informs about the level of garbage collected in the garbage bins.
- To keep our Environment clean & green. The cost & effort are less in this system.

### IV. PROPOSED METHODOLOGY

The IOT Garbage Monitoring system is a very innovative system which will help to keep the cities clean. This system monitors the garbage bins and informs about the level of garbage collected in the garbage bins via a web page. For this the system uses ultrasonic sensors placed over the bins to detect the garbage level and compare it with the garbage bins depth. The system makes use of Arduino family microcontroller, LCD screen, Wi-Fi modem for sending data and a buzzer. The system is powered by a 12V transformer. The LCD screen is used to display the status of the level of garbage collected in the bins.

Whereas a web page is built to show the status to the user monitoring it. The web page gives a graphical view of the garbage bins and highlights the garbage collected in color in order to show the level of garbage collected. The LCD screen shows the status of the garbage level. The system puts on the buzzer when the level of garbage collected crosses the set limit. Thus this system helps to keep the city clean by informing about the garbage levels of the bins by providing graphical image of the bins via a web page.


The ESP8266 Wi-Fi Module is a self-contained SOC with integrated TCP/IP protocol stack that can give any microcontroller access to your Wi-Fi network. The ESP8266 is capable of either hosting an application or offloading all Wi-Fi networking functions from another application processor. Each ESP8266 module comes preprogrammed with an AT command set firmware. The ESP8266 module is an extremely cost effective board with a huge, and ever growing, community.

## International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 8, Issue 12, December 2019

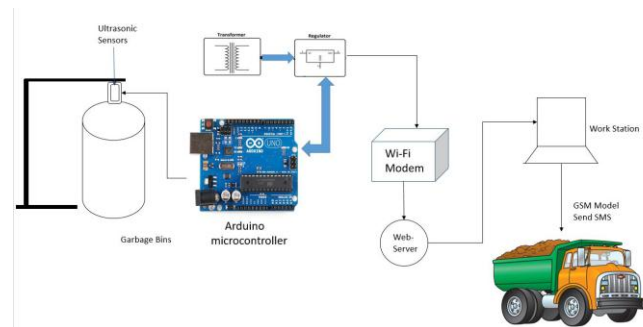

**Figure: System Architecture Diagram**

**HARDWARE USED:** Microcontroller: It get information from sensor and process on it. It compares the received data with the threshold level set and accordingly output is generated. The LPC2131/32/34//38 microcontrollers are based on a 16/32-bit ARM7TDMI-S CPU with real-time emulation and embedded trace support, that combine the microcontroller with 32 kB, 64 kB, 128 kB, 256 kB and 512 kB of embedded high-speed flash memory. A 128-bit wide memory interface and unique accelerator architecture enable 32-bit code execution at maximum clock rate.

**Power Supply:** We use 12v power supply in our project. It is mainly used to provide DC voltage to the components on board. 3.3V for lpc2138 and 4.2v for Wi-Fi module is apply from power supply. 5V is required for relay applied from power supply.

**WI-FI Modem:** This module has a powerful enough on-board processing and storage capability that allows it to be integrated with the sensors and other application specific devices through its GPIOs with minimal development up-front and minimal loading during runtime. Its high degree of on-chip integration allows for minimal external circuitry, including the front-end module, is designed to occupy minimal PCB area. The ESP8266 supports APSD for VoIP applications and Bluetooth co-existence interfaces, it contains a self-calibrated RF allowing it to work under all operating conditions, and requires no external RF parts.

There is an almost limitless fountain of information available for the ESP8266, all of which has been provided by amazing community support. In the Documents section below you will find many resources to aid you in using the ESP8266, even instructions on how to transforming this module into an IoT (Internet of Things) solution! Note: The ESP8266 Module is not capable of 5-3V logic shifting and will require an external Logic Level Converter. Please do not power it directly from your 5V dev. board.

**Ultrasonic Sensor:** The Ultrasonic Sensor sends out a high-frequency sound pulse and then times how long it takes for the echo of the sound to reflect back. The sensor has 2 openings on its front. One opening transmits ultrasonic waves, (like a tiny speaker), the other receives them, (like a tiny microphone). The speed of sound is approximately 341 meters (1100 feet) per second in air. The ultrasonic sensor uses this information along with the time difference between sending and receiving the sound pulse to determine the distance to an object.

**GSM Module:** It is used to send message to the garbage depot if the Garbage Can exceeds the set threshold level. With the help of GSM module interfaced, we can send short text messages to the required municipal office. GSM module is provided by sim uses the mobile service provider and send sms to the respective authorities as per programmed. It operates at either the 900 MHz or 1800 MHz frequency band

# International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 8, Issue 12, December 2019

## V. CONCLUSION

Hence overall we conclude that the main objective is to maintain the level of cleanliness in the city and form an environment which is better for living. By using this system we can constantly check the level of the garbage in the dustbins which are placed in various parts of the city. If a particular dustbin has reached the maximum level then the employees can be informed and they can immediately take certain actions to empty it as soon as possible. The employees can check the status of these bins anytime on their mobile phones by visiting corresponding website. This can prove to be a very useful system if used properly. The system can be used as a benchmark by the people who are willing to take one step further for increasing the cleanliness in their respected areas. Ultrasonic sensor is being used in this system to check the level of garbage in the dustbins but in future various other types of sensors can be used with the ultrasonic sensor to get more precise output and to take this system to another level. One of important advantage of this system is it is really helpful in improving the quality of environment and is a step towards fulfilling goal of SWACH BHARAT ABHIYAN a government initiative for environment cleanliness.

## REFERENCES

1. S. H. Almotiri, M. A. Khan, and M. A. Alghamdi, "Mobile health (m- health) system in
2. Medvedev A, Fedchenkov P, Zaslavsky A, Anagnostopoulos T and Khoruzhnikov S 2015 Waste management as an IoT-enabled service in smart cities in Conference on Smart Spaces Springer International Publishing 104-15.
3. Navghane S S, Killedar M S and Rohokale D V 2016 IoT Based Smart Garbage and Waste Collection Bin International Journal of Advanced Research in Electronics and Communication Engineering (IJARECE) 5 1576-78.
4. Monika K A, Rao N, Prapulla S B and Shobha G 2016 Smart Dustbin-An Efficient Garbage Monitoring System International Journal of Engineering Science and Computing 6 7113-16
5. IoT Based Waste Management for Smart City Parkash1, Prabu V2 PG Diploma Student and Dept.of Embedded System Design, NIELIT, Calicut, and Kerala, India International Journal of Innovative Research in Computer and Communication Engineering, Vol. 4, Issue 2, February 2016.
6. IOT Smart Garbage Monitoring System in Cities-An Effective Way to Promote Smart City Palaghat Yaswanth Sai Department of Computer Science and Engineering, Narayana Engineering College, Gudur, Andhra Pradesh, India Volume 7, Issue 2, February 2017
7. IOT based garbage monitoring system Dr. K. Alice Mary<sup>1</sup>, Perreddy Monica<sup>2</sup>, A.Apsurrunisa<sup>3</sup>, Chathala Sreekanth<sup>4</sup>, G. PavanKumar<sup>5</sup>.Professor<sup>1</sup>, UG scholars<sup>2345</sup>, EEE Department, Gudlavalleru Engineering College, Krishna District, AP, India. International Journal of Scientific & Engineering Research, Volume 8, Issue 4, April-2017 ISSN 2229-5518
8. Smart Garbage Monitoring System using Internet of Things (IOT) Prof. Dr. Sandeep M. Chaware<sup>1</sup>, Shriram Dighe<sup>2</sup>, Akshay Joshi<sup>3</sup>, Namrata Bajare<sup>4</sup>, Rohini Korke<sup>5</sup> International Journal of Innovative Research in Electrical, Electronics, Instrumentation and Control Engineering ISO 3297:2007 Certified Vol. 5, Issue 1, January 2017
9. IOT based garbage management system Akash k t, Dinesh choudhari S Y, Sandeep C U, Prof. Rashmi P M Department of Electronics & Telecommunication Dr D.Y.Shool of Engg, Pune, India Volume 6, Issue 4, April 2017, ISSN: 2278 – 1323.
10. Garbage monitoring system using IoT Anitha A School of Information Technology and Engineering, VIT University, Vellore-632014, Tamil Nadu, India, doi:10.1088/1757-899X/263/4/042027.
11. Journal of Advanced Research in Dynamical and Control Systems Vol. 9. Sp– 6 / 2017 JARDCS Special Issue On Trends and Future in Engineering 133 Smart Garbage monitoring system using sensors and RFID over internet of things Somu Dhana Satyamanikanta<sup>1</sup>, M.Narayanan<sup>2</sup>.
12. <http://www.inforcecomputing.com/blog/an-introduction-to-embedded-systems-and-iot/>