

18th September 2020

Organized by

Department of Computer Science, Parvathy's Arts and Science College, Dindigul, Tamilnadu, India

Water Quality Modelling For Coastal Engineering Projects A Review

DR R Manivanan

Scientist, Central Water and Power Research Station, Khadakwasla R S, Pune, Maharashtra State, India

ABSTRACT: Water quality models are often effective tools to simulate and predict waste transport in water surroundings, which might contribute to saving the value of labors and materials for an oversized variety of chemical experiments to some extent. Standardization of water quality models will facilitate environmental management agencies guarantee the consistency in application of water quality models for restrictive functions. The water uses maps, engineered by combining the results of the water quality model with the power criteria, could be a product able to be utilized by managers for decision-making. As such, their continuous update ought to be a part of the water quality management program.

KEYWORDS: Water Quality Models , MIKE21

I. INTRODUCTION

Water plays an important role in our daily life and without it no life on the earth. Most activities in our life depend on water such as drinking, agriculture, a medium of transportation and many more. In fact, many great civilizations have started near to the source of water whether river, lake, coastal etc. such as Mesopotamia, Egypt, and many more.

Water quality models can be effective tools to simulate and predict pollutant transport in coastal water environment, which can contribute to saving the cost of labours and materials for a large number of industrial developments in the coastal region. Therefore, water quality models become an important tool to identify water pollution and the final fate and behaviours of pollutants in coastal environment. These developmental projects such as nuclear power plants, desalination plants, ports and harbours construction projects can bring serious effects on coastal environment after enforcement. Therefore, these environmental impacts have to be analysed, simulated, predicted, and assessed using mathematical and numerical models before these construction projects are implemented. These modeling results under different pollution scenarios using water quality models are very important components of marine Environmental Impact Assessment. Moreover, they are also the important basis for environmental management decisions. With the development of model theory and the fast-updating computer technology, more and more water quality models have been developed with various model algorithms. Up to date, tens of types of water quality models including hundreds of model software have been developed and applied for different topography, water bodies, and pollutants at different space and time scales.

II. DEVELOPMENT OF WATER QUALITY MODELS

Water quality models have undergone a long period of development since Streeter and Phelps (1925) built the first water quality model (S-P model) to control river pollution in Ohio state of the US (Streeter, H.W., Phelps, E.B., 1925). Water quality models have made a big progress from single factor of water quality to multifactors of water quality, from steady-state model to dynamic model, from point source model to the coupling model of point and nonpoint sources, and from zero-dimensional mode to one-dimensional, two-dimensional, and three-dimensional models. More than 100 water quality models have been developed up to now. Cao and Zhang (2006) classified these models based on water body types, model-establishing methods, water quality coefficient, water quality components, model property, spatial dimension, and reaction kinetics. However, each water quality model has its own constraint conditions (Burn DH and McBean EA. 1985). Therefore, water quality models still need to be further studied to overcome the shortcomings of these current models.

2.1 The Primary Stage (1925–1965)

Water quality of water bodies has been paid much more attention during 1925 and 1965. The water quality models focused on the interactions among different components of water quality systems as affected by living and industrial point source pollution (Wang JQ et. al. 2004). Like hydrodynamic transmission, sediment oxygen demand and algal

18th September 2020

Organized by

Department of Computer Science, Parvathy's Arts and Science College, Dindigul, Tamilnadu, India

photosynthesis and respiration were considered as external inputs, whereas the nonpoint source pollution was just taken into account as the background load (Riffat R. 2012).

The simple BOD-DO bilinear system model was developed and achieved a success in water quality prediction, and the one-dimensional model was applied to solve pollution issues in rivers and estuaries (Burn DH and McBean EA. 1985). After that, most researchers and scientists modified and further developed the Streeter-Phelps models (S-P models). For example, Thomas Jr. (1945) reported that oxygen consumption due to sediment deposition and flocculation processes. O'Connor (1967) divided BOD parameter into carbonized BOD and nitrified BOD and added the effects of dispersion based on the equation. Dobbins W.E. (1964) added two coefficients, including the changing rate of BOD caused by sediment release and surface runoff as well as the changing rate of DO controlled by algal photosynthesis and respiration, to Thomas's model.

2.2 The Improving Stage (1950–1975)

From 1965 to 1975, water quality models were classified as six linear systems and made a rapid progress based on further studies on multidimensional coefficient estimation of BOD-DO models. The one-dimensional model was updated to a two-dimensional models which were applied to water quality simulation of lakes and gulfs (Gough DI. 1969). Nonlinear system models were developed during the period from 1970 to 1975 (Yih S-M and Davidson B. 1975). These models included the N and P cycling system, phytoplankton and zooplankton system and focused on the relationships between biological growing rate and nutrients, sunlight and temperature, and phytoplankton and the growing rate of zooplankton (Riffat R. 2012).

After 1975, the number of state variables in the models increased greatly, and the three-dimensional models were developed at this stage, and the hydrodynamic mode and the influences of sediments were introduced to water quality models (Wolanski E, 1992). The typical models including QUAL models, MIKE11 model, and WASP models were developed and used at this stage.

2.3 The Advanced Stage (after 1975)

Nonpoint source pollution has been reduced due to strong control in developed countries. Although nutrients and toxic chemical materials depositing to water surface have been included in model framework, these materials not only deposited directly on water surface but also they can be deposited on the land surface of a water body and sequentially transferred to water body (Esterby SR. 1996).

Among the previously mentioned water quality models, these models including the Streeter-Phelps model, QUASAR model, QUAL model, WASP model, CE-QUAL-W 2 model, HEC-RAS model, MIKE model, and EFDC model were widely applied worldwide.

III. MIKE21 DYNAMIC MODELLING TOOL ECO LAB

Dynamic ecological modelling tool is the basis for an ecosystem approach to environmental management. It allows quantitative, dynamic descriptions of water quality in the short or long term and includes nutrient dynamics, plankton, eelgrass, macroalgae and benthic fauna. The different standard ECO Lab models are developed and optimised to address specific environmental challenges. These include including varying climatic conditions and varying complexities from simple interactions to complex ecosystem models.

ECO Lab is the preferred solution for assessing factors such as:

- Effects of nutrient loadings on the status of the aquatic environment
- Strategies for wastewater treatment (nutrients and bacteria)
- Causes and impacts of oxygen depletion events
- Effects of cooling water discharges
- Environmental impacts of constructing large infrastructures like harbours, bridges or tunnels
- Impact of dredging on primary production and growth of benthic vegetation & mussels environmental consequences of developing new urban and industrial areas
- Efficiency of action plans related to nutrient reductions and long term effects of reduction scenarios risks in connection with algal blooms site selection, optimisation of production and Environmental Impact Assessments (EIAs) in connection with aquaculture production.

With ECO Lab is a **complete numerical laboratory** for water quality and ecological modeling. It can simply define the process using standard templates as a basis. It enables to transform any aquatic ecosystem into a reliable numerical model for accurate predictions. ECO Lab uses a so-called ECO Lab object to perform the ECO Lab calculations. The ECO Lab object is generic and shared with a number of different hydrodynamic flow model systems. It consists of an

18th September 2020

Organized by

Department of Computer Science, Parvathy's Arts and Science College, Dindigul, Tamilnadu, India

interpreter that first translates the equation expressions in the ECO Lab template to lists of instructions that enables the object to evaluate all the expressions in the template. During simulation the model system integrates one time step by simulating the transport of advection state variables based on hydrodynamics. Initial concentrations or updated AD concentrations, coefficients/constants and updated forcing functions are loaded into the ECO Lab object and then the ECO Lab object evaluates all the expressions, integrates one time step, and returns updated concentration values to the general flow model system that advances one time step. An illustration of the data flow is shown in Figure 1.

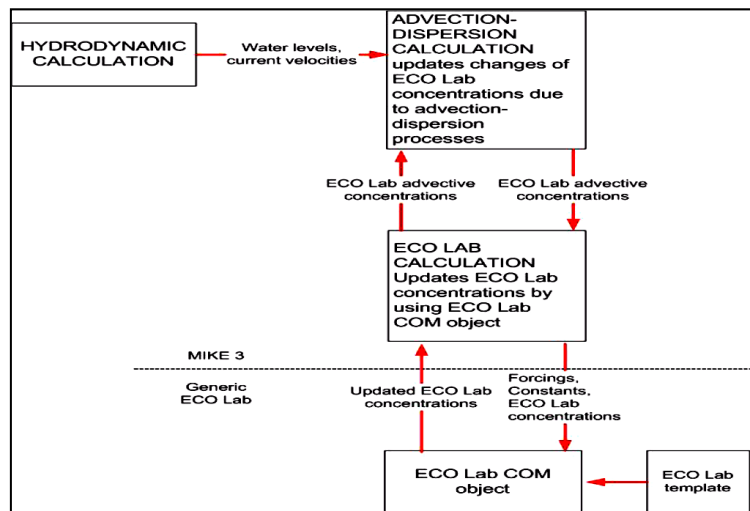


Figure1. : Flow chart of Hydrodynamic Model and ECO Lab (MIKE21) Model

IV. MIKE21 ECOLAB SOFTWARE

4.1. MIKE21 Water Quality Simple (DO and BOD)

The main reason for modelling the dissolved oxygen concentration is to ensure that it is above acceptable levels for biota in the area under consideration. Oxygen in the aquatic environment is produced by photosynthesis of algae and plants and consumed by respiration of plants, animals and bacteria, Biological Oxygen Demand(BOD) degradation, sediment oxygen demand and oxidation of nitrogen compounds. In addition, dissolved oxygen is re-aerated through interchange with the atmosphere. The carbonaceous BOD is an expression of the water's organic matter content. The organic matter content is measured by registering the oxygen consumed during the degradation for a period of 5 days.

4.2. MIKE21 Water Quality with Nutrients (Nitrates, Phosphates, & Ammonia)

The nutrients considered are the inorganic forms of nitrogen and phosphorus. The nitrogen cycle starts with an assimilation of free nitrogen from the atmosphere (e.g. blue green algae) or uptake by algae and plants of ammonia from the water. Degradation of dead organic matter leads to a release of the organic bound nitrogen in the form of ammonia. The degrading bacteria, however, utilize some of the nitrogen for their own growth. The rest of the ammonia released by ammonification or discharged from pollution

4.3. MIKE21 Water Quality with Nutrients and Chlorophyll

Similar to above template, this template simulates chlorophyll a along with 1 nutrients. It simulates water quality parameters such as DO, BOD, nitrates, phosphates, ammonia and chlorophyll.

4.4. MIKE21 WATER Quality Simple with Coli-Forms

It simulates water quality parameters such as DO, BOD, and fecal coli-forms and total coli-forms in the water ecosystem. WQ SIMPLE with coli-forms modelling template is used to investigation of hygienic water quality and based on sources of pollution as an instrument in water quality assessments. This template can be applied to studies considering bacterial pollution such as domestic sewage and industrial effluent and agricultural runoff, bacterial pollution from sewage outfall, waste water treatment plants, cost effective solution improving the hygienic water quality.



18th September 2020

Organized by

Department of Computer Science, Parvathy's Arts and Science College, Dindigul, Tamilnadu, India

4.5. MIKE21 Water Quality Simple including Temperature and Salinity

It simulates water quality parameters such as DO, BOD, with temperature and salinity concentration in the water ecosystem. This template used for investigation of pollution levels in the water ecosystem with temperature and salinity. It can be applied to modelling of intake/ outfall studies for nuclear, thermal and other power plants, reverse osmosis plants and desalination plants.

4.6. MIKE21 Water Quality Simple Including Temperature, Salinity and Coli-Forms

This template is combined of all above parameters such as DO, BOD, with temperature, salinity and coli-forms concentration in the water ecosystem. The application of the template is bacterial pollution such as domestic sewage and industrial effluent and agricultural run off, bacterial pollution from sewage outfall, waste water treatment plants, cost effective solution improving the hygienic water quality and modeling of intake/ outfall studies for nuclear, thermal and other power plants, reverse osmosis plants and desalination plants.

V. CASE STUDIES

5.1 Mathematical Model Studies to Examine the Dispersion of Effluent Discharge at the Outfall located near Proposed Port at Nandgaon, Thane, Maharashtra

JSW Infrastructures Limited (JSWIL) and Maharashtra Maritime Board (MMB) has entrusted mathematical model studies to examine the dispersion of effluent discharge at the outfall located near proposed port for the captive cargo of the MIDC, Tapapore and Vapi industrial area at Nandgaon to CWPRS, Pune. Predictive model simulation would be carried out for the effluent dispersion in the proposed port and adjacent area and examine the water quality plume behavior in the vicinity of the proposed port area.

5.2 Modeling Techniques

For studies, mathematical model MIKE3 HD (DHI 2010) was used for simulation of hydrodynamics in the proposed area. The MIKE3 HD model was developed by Danish Hydraulics Institute (DHI), Denmark, and is widely used commercial software. Brief description of this model is given below.

5.3 The Hydrodynamic Model (MIKE21 HD)

The hydrodynamic model MIKE 21 –HD (DHI, 2010) was used for simulation of waterlevels and flows in coastal areas.

x- direction

$$\frac{\partial u}{\partial t} + \frac{\partial u^2}{\partial x} + \frac{\partial uv}{\partial y} + \frac{\partial wu}{\partial z} = fv - g \frac{\partial \zeta}{\partial x} - \frac{1}{\rho_0} \frac{\partial p_a}{\partial x} - \frac{g}{\rho_0} \int_z^\zeta \frac{\partial \rho}{\partial x} dz + F_u + \frac{\partial}{\partial z} \left(\nu_t \frac{\partial u}{\partial z} \right) + u_s S_c$$

----1

y- direction

$$\frac{\partial v}{\partial t} + \frac{\partial v^2}{\partial y} + \frac{\partial uv}{\partial x} + \frac{\partial wv}{\partial z} = fu - g \frac{\partial \zeta}{\partial y} - \frac{1}{\rho_0} \frac{\partial p_a}{\partial y} - \frac{g}{\rho_0} \int_z^\zeta \frac{\partial \rho}{\partial y} dz + F_v + \frac{\partial}{\partial z} \left(\nu_t \frac{\partial v}{\partial z} \right) + v_s S_c$$

-----2

Where, 1. Fluid acceleration , 2. Horizontal gradients in the velocity, 3. Coriolis acceleration, 4. Acceleration from sea surface elevation, 5. Pressure gradient term, 6. Acceleration from buoyancy effects, 7. Imbalance of horizontal Reynolds stresses, 8. Vertical stresses from the Bousinesq approximation and 9. Acceleration from discharges

It simulates unsteady two-dimensional flows in coastal area and is based on the following non-linear vertically integrated 2-D equations of conservation of mass and momentum.



18th September 2020

Organized by

Department of Computer Science, Parvathy's Arts and Science College, Dindigul, Tamilnadu, India

5.4 The Model MIKE21 ECOLAB

The module is mostly used for modelling water quality as part of an Environmental Impact Assessment (EIA) of different human activities of estuary, creek and open ocean area with MIKE21, MIKE3, MIKE11 hydrodynamics. The strength of this tool is the easy modification and implementation of mathematical descriptions of ecosystems into the hydrodynamic software. The 2D depth-averaged transport equation for a non-conservative pollutant is given as:

$$\frac{\partial C}{\partial t} = Dx \frac{\partial^2 C}{\partial x^2} + Dy \frac{\partial^2 C}{\partial y^2} - U \frac{\partial C}{\partial x} - V \frac{\partial C}{\partial y} - \lambda C$$

where Dx, Dy are the dispersion coefficients in x and y direction; U, V are the depth mean velocities in the x and y directions, respectively (m/sec); λ is the decay coefficient (s-1). This equation is numerically solved by an explicit finite difference scheme using MIKE21. The model outputs are evaluated using the performance criteria described in the next section.

5.5 Results

As the water quality plumes dispersed (Figure 2) shore attached on northward and southward directions and offshore region for existing outfall and along with proposed port, the plumes always towards offshore region and northward direction with minimum concentration. Hence, may not be observed any impact on coastline and proposed port region.

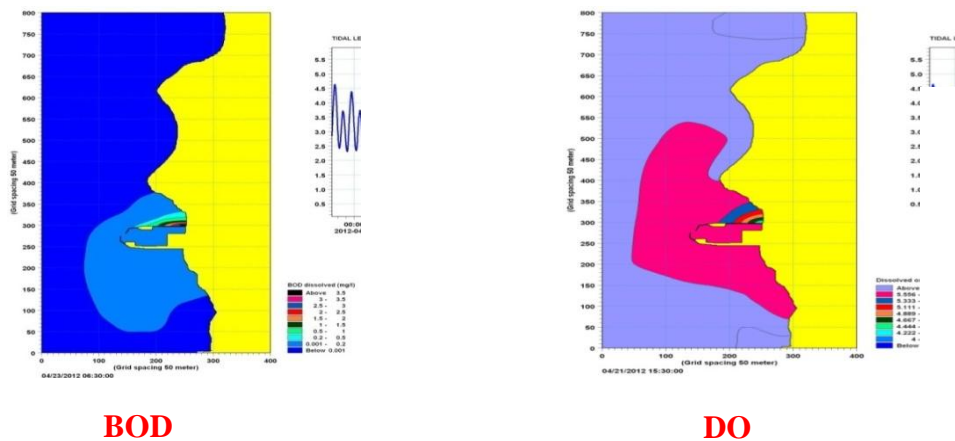


Figure 2: BOD and DO Distribution in the Nandgaon Region

VI. CASE STUDY II

6.1 Dispersion of Brine Water Discharge from Reverse / Osmosis Plant at Ennore Coast, Tamil Nadu

Reverse Osmosis Plant draws saline water from sea intake, converts it into potable water, and discharges brine water at out fall as effluent. Mathematical model studies were carried out for dispersion of brine water with salinity of 63ppt from a Reverse Osmosis (RO) plant into coastal waters at north Chennai.

Studies were carried out to determine suitable locations of intake and outfall system for RO Plant such that recirculation of brine water is minimum (Figure 3). An Expert System called CORMIX II was used and studies were conducted for three alternatives namely alternative I which is 1000m distance from shoreline, alternative II is assumed 750m distance from shoreline and alternative III is 500m from shoreline.

18th September 2020

Organized by

Department of Computer Science, Parvathy's Arts and Science College, Dindigul, Tamilnadu, India

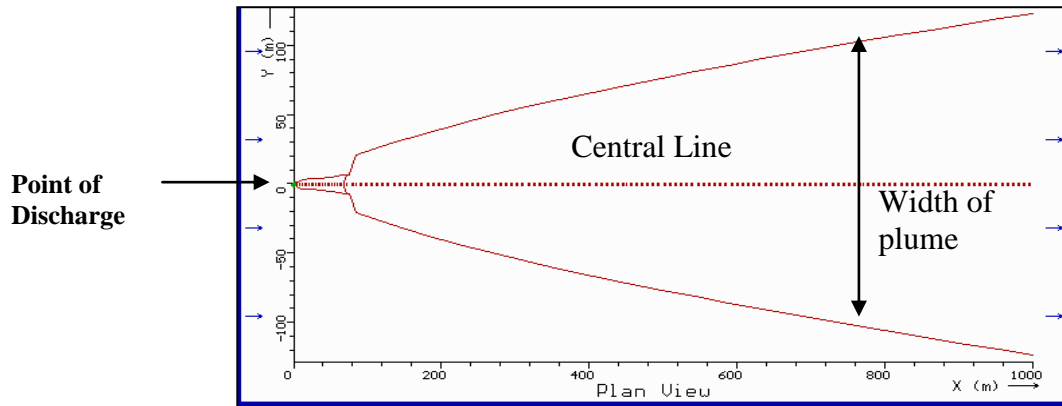


Figure3. : Salinity Distribution at Ennore Coastal area

The results (Figure 4) depicted for alternatives I, II, the plume away from the intake and the possibility of recirculation of brine water is not observed. However there is a possibility of recirculation of brine water with 0.1ppt salinity in alternative-III. Hence, the alternative I and II are found suitable for the dispersal of brine water with vertical jet from a port diameter of 0.15m.

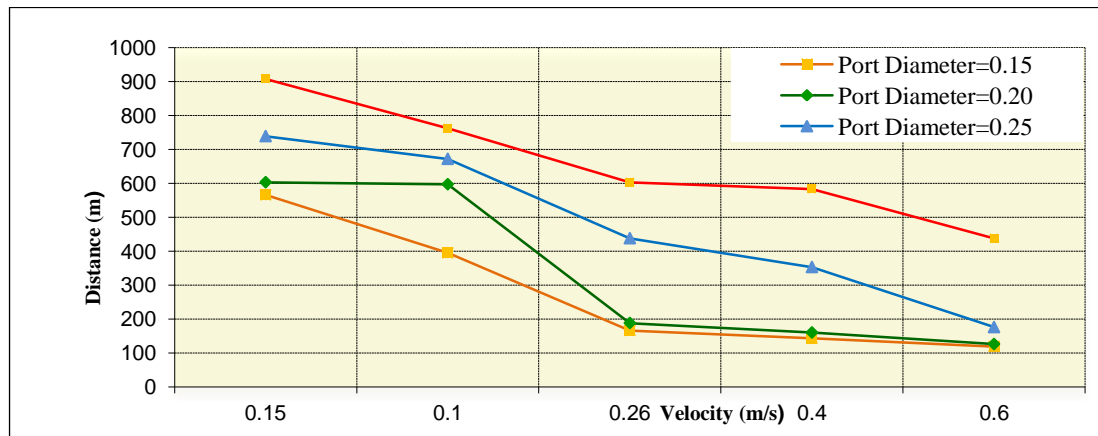


Figure 4: Dispersion Distance from Outfall for 0.1 ppt Concentration

The alternative-I is expensive compared to alternative-II as it is 250m away from alternative-II. The study indicated that higher velocity and larger port diameter helps in enhancing dispersion rate and hence adverse effects on marine environment could be minimised (Manivanan R et. al, 2006).

VII. CONCLUSION

Environmental analysts require estimates of water pollution levels and expected dispersion/transport patterns following intentional or accidental incidences and industrial waste releases to coastal environments. Numerical modelling assists in assessing potential impacts to human/environmental health and government operations by providing predictive estimates of pollutant transport in the nearby area, speed and direction of travel. The water quality modelling is a useful tool for coastal engineering projects with respect to industrial and domestic effluents discharged in to coastal areas



18th September 2020

Organized by

Department of Computer Science, Parvathy's Arts and Science College, Dindigul, Tamilnadu, India

REFERENCES

- [1] Burn DH, McBean EA. (1985) Optimization modeling of water quality in an uncertain environment. *Water Resources Research.*;21(7):934–940.
- [2] Cao XJ, Zhang H. (2006) Commentary on study of surface water quality model. *Jr. of Water Resources and Arch.Eng.* 4(4):18–21. (Rus).
- [3] Danish Hydraulic Institute. MIKE21(2010): Hydrodynamic Module, User Guide and Ref. Man.. Horsholm, Denmark: DHI.
- [4] Danish Hydraulic Institute. MIKE 21 (2010) Eutrophication Module, User Guide and Reference Manual, Release 2. 7. Horsholm, Denmark: DHI.
- [5] Dobbins WE.(1964) BOD and oxygen relationships in streams. *Sanitary Eng. Division, Amer.Soc.of Civil Engineers.* 90(3):53–78.
- [6] Esterby SR.(1996) Review of metds for the detection and est. of trends with emphasis on water quality app.. *Hydro. Processes.*10(2):127–149.
- [7] Gough DI.(1969) Incremental stress under a two-dimensional artificial lake. *Canadian Jr. of Earth Sciences.* 6(5):1067–1075.
- [8] Manivanan R. L. R. Renganath and C. N. Kanetkar(2006) “ Mixing zone simulation of brine water and solid dispersion performance in the coastal environment using mathematical models” APD IAHR Intl.Conf.,IIT, Chennai.
- [9] Manivanan.R,S. N. Jha, and M D Kudale, (2014) ' Locating the intake and outfall structures of coastal plants through thermal/salinity dispersion studies Intl. Jr. of Earth Sciences and Engineering. 07, (02):439-446
- [10] O'Connor DJ.(1967) The temporal and spatial distribution of dissolved oxygen in streams. *Water Reso. Res.*3(1):65–79.
- [11] Riffat R. (2012) *Fundamentals of Wastewater Treatment and Engineering.* Boca Raton, Fla, USA: CRC Press; 2012.
- [12] Streeter HW, Phelps EB. (1925) *A Study of the Pollution and Natural Purification of the Ohio River.* U.S. Dept. of Health, Edu. and Welfare; 1925.
- [13] Thomas HA., (1948) The pollution load capacity of streams. *Water Sewage Works.* 95:409–413.
- [14] Wang JQ, Zhong Z, and Wu J. (2004) Steam water quality models and its development trend. *Jr. of Anhui. Normal Univ.*, 27(3):243–247.
- [15] Wolanski E, Mazda Y, Ridd P. (1992) Mangrove hydrodynamics. *Coastal and Estuarine Studies.* 41:43–62.
- Yih S-M, Davidson B. (1975) Identification in nonlinear, distributed parameter water quality models. *Water Reso. Res.*;11(5):693–704.