

Volume 13, Issue 5, May 2024



Impact Factor: 8.423





6381 907 438





|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

Login Authentication through Face Recognition using Deep Learning

Rajnikant Totare¹, Prashant Malge², Chaitanya Tate³, Jayesh Minigi⁴, Prof. Manisha Mehrotra⁵

Student, Department of Computer Engineering, Dhole Patil College of Engineering, Pune, India 1234

Professor, Department of Computer Engineering, Dhole Patil College of Engineering, Pune, India 5

ABSTRACT: The realm of facial recognition technology is witnessing a surge in advancements, thanks to the strides made in deep learning methodologies and the availability of expansive training datasets. Nevertheless, its practical implementation for authentication purposes encounters hurdles in real-world settings marked by variations in facial poses, angles, lighting conditions, and potential obstructions. To tackle these obstacles, this paper introduces an innovative deep learning API that amalgamates the functionalities of MTCNN and Face Net. By leveraging MTCNN for precise face detection and Face Net for extracting facial features, the API employs a two-step verification process. Face Net facilitates the mapping of facial images into a compact Euclidean space, where spatial distances directly correlate with facial similarity, subsequently storing this data securely within a MongoDB database. Utilizing the Deep Face model developed by Facebook's AI research team, the system achieves remarkable accuracy in user verification. This API not only enhances user authentication but also optimizes the user experience, thereby mitigating the risk of unauthorized access. While acknowledging areas for potential improvement, this paper offers a comprehensive summary of its findings and delves into the challenges lying ahead.

KEYWORDS: Facial recognition, deep learning, MTCNN, FaceNet, MongoDB, authentication, Deep Face model, user verification.

I. INTRODUCTION

In today's digital landscape, the importance of robust authentication systems cannot be overstated. Conventional methods like passwords and email verifications are increasingly vulnerable to sophisticated cyber threats. Recognizing this growing challenge, our research project sets out to develop an advanced authentication system by harnessing the potential of facial recognition technology. Our approach involves integrating Multi-Task Cascaded Convolutional Networks (MTCNN) for precise face detection and FaceNet for accurate facial feature extraction. This two-step verification process not only strengthens security but also enhances user experience. Facial recognition technology offers a unique and biometrically secure method of authentication. MTCNN, known for its effectiveness in detecting facial landmarks, forms the foundational stage of our system. Following this, FaceNet, a cutting-edge deep learning model developed by Google, maps facial features into a compact Euclidean space, generating a reliable and distinctive representation for each individual. By combining these technologies, we aim to address the weaknesses of traditional authentication methods and significantly enhance security measures.

Our project delves into the nuances of facial recognition, grappling with challenges such as variations in facial expressions, poses, and lighting conditions. Through a thorough examination of MTCNN and FaceNet, we aim to uncover their combined potential in creating an authentication system that balances accuracy, efficiency, and user-friendliness. The insights gained from our research contribute not only to the academic understanding of biometric security but also offer practical guidance for implementing facial recognition-based authentication systems in real-world scenarios.

As we delve into our research methodology and literature review, our paper strives to provide a comprehensive overview of our endeavors. We aim to highlight the progress made and the challenges faced in our quest for a more secure digital environment.

II. PROPOSED MODEL

The proposed model integrates MTCNN for precise face detection and FaceNet for high-dimensional facial embeddings, enabling robust and efficient facial recognition-based authentication. This fusion ensures accurate verification under challenging conditions, offering a seamless and secure authentication experience while facilitating easy integration into existing systems.



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

1. MTCNN (Multi-task Cascaded Convolutional Neural Network):

1st Stage: This stage employs a fully convolutional network without any fully connected layers. It utilizes convolutional layers with a kernel size of 12x12 to create boundary boxes around detected faces. The objective is to identify potential face regions in the input image.

2nd Stage (R-Net): The second stage aims to reduce the number of boundary boxes generated in the previous stage. It applies further processing to refine the candidate face regions and discard redundant boxes with large overlaps.

3rd Stage (Output Network): In the final stage, only one boundary box is retained per detected face region. This stage also predicts facial landmarks, such as the positions of eyes, nose, and mouth, within the detected faces.

2. FaceNet:

Architecture: FaceNet utilizes a 22-layer deep neural network architecture for facial feature extraction. It is trained using a triplet loss function, which compares triplets of images: an anchor image (belonging to the same person), a positive image (also belonging to the same person), and a negative image (belonging to a different person). The objective is to learn embeddings that minimize the distance between embeddings of the anchor and positive images while maximizing the distance between embeddings of the anchor and negative images.

Triplet Loss Function: The triplet loss function ensures that embeddings of the same person's face are closer together in the embedding space compared to embeddings of different individuals. This helps in learning discriminative features for face recognition.

3. MongoDB:

User Collection: MongoDB contains a collection dedicated to storing user information, such as usernames, passwords, and other relevant details.

Embedding Collection: Another collection within MongoDB is used specifically for storing facial embeddings generated by FaceNet. Each document in this collection may contain the embedding vector along with metadata associated with the corresponding user or image.

III. BLOCK DIAGRAM OF THE PROPOSED MODEL

Given below is the block diagram of the proposed model:

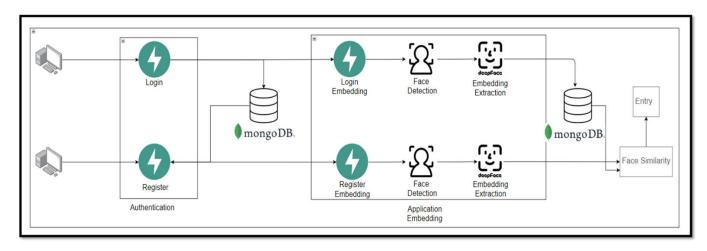


Figure 1: Block Diagram of the Proposed Model

1. User Login:

This component verifies the user's embedding during login. It identifies the user's face from the provided image, generates embeddings, matches them with the stored embeddings in the database, and confirms the user's identity by assessing cosine similarity.

2. User Registration:

This module saves the user's embedding during registration. During registration, it computes embeddings from the provided images, computes the average embedding (if multiple images are available), and persists this data in the database for subsequent authentication.



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

3. MongoDB Client:

This functionality handles the MongoDB connection and data access for user-related information. It initializes the MongoDB client with the specified URL, establishes connectivity with the MongoDB database, and ensures a single client instance throughout the application's lifecycle. This interface facilitates interaction with the MongoDB database housing user data.

IV. ALOGRITHM USED IN THE PROPOSED MODEL

The algorithm used in the proposed model is a combination of Multi-task Cascaded Convolutional Networks (MTCNN) and the FaceNet model.

1. MTCNN (Multi-task Cascaded Convolutional Networks):

This algorithm is employed for precise face detection. It consists of three stages: face detection, bounding box regression, and facial landmark localization. MTCNN is known for its robustness and accuracy in detecting faces under various conditions, including different poses, scales, and occlusions.

2. FaceNet:

After face detection, the FaceNet model is utilized for facial feature extraction. FaceNet employs deep convolutional neural networks (CNNs) to directly map facial images into a compact Euclidean space, where spatial distances directly reflect facial similarity. This embedding space enables accurate comparison and recognition of faces based on their unique features.

By combining MTCNN for face detection and FaceNet for feature extraction, the proposed algorithm ensures precise identification of individuals, even in challenging scenarios with variations in facial poses, angles, lighting conditions, and potential obstructions.

V. EXPERIMENTAL RESULTS

A) User Interface of the Developed GUI

1) Initial Access

- Access the application via the browser (localhost).
- The user initiates the registration process
- Application Overview Web App Initialization

2) Registration

User proceeds with the registration, providing necessary details.

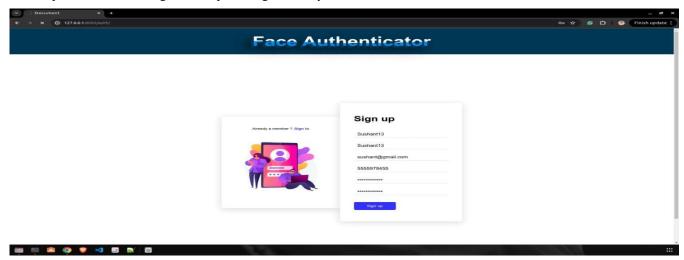


Figure 2 – Sign Up Process



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

Camera access is granted for capturing 8 images.

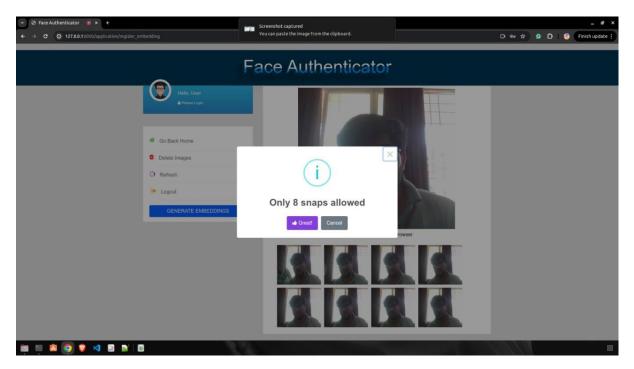


Figure 3- Capturing Images

The captured images are stored as part of the user's registration in MongoDB Camera Activation – Registration Embedding Collecting Images after Camera Activation Generating Embedding in the Backend

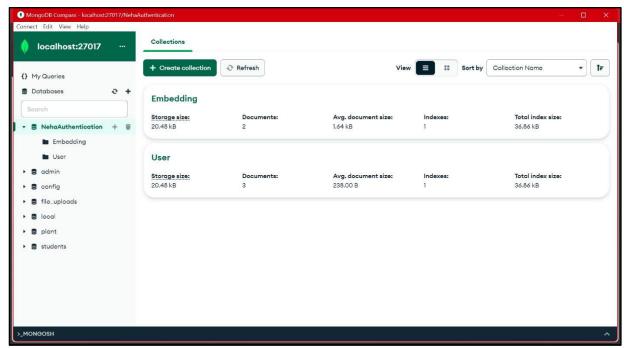


Figure 4: MongoDB Embedding



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

3) Login

Once registered, the user logs into the system using their username and password

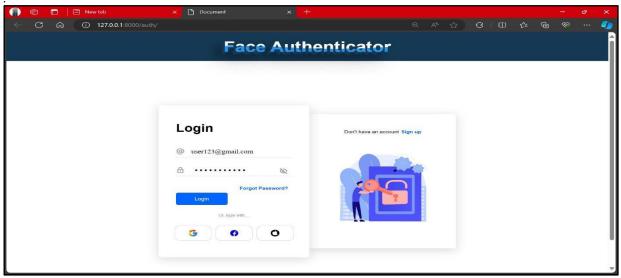


Figure 5: Login with Uusername and password

Application Overview - Web-App Initialization



Figure 6 a: Login Camera



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| <u>www.ijirset.com</u> | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

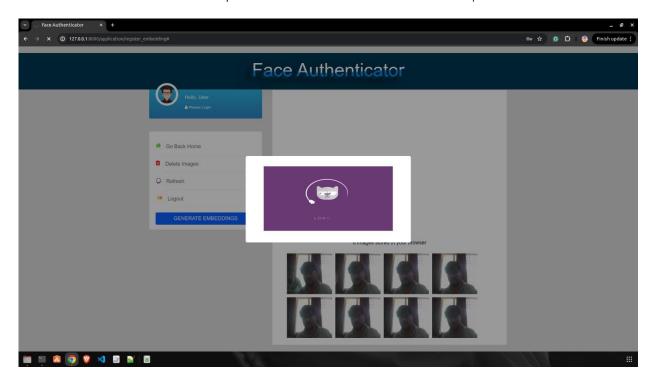


Figure 6 b: Authenticating Images

- Setting Up the Login Camera
- User Authentication Successful



Figure 7: User Authentication Successful



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

B) Given Below is the result of the experiment

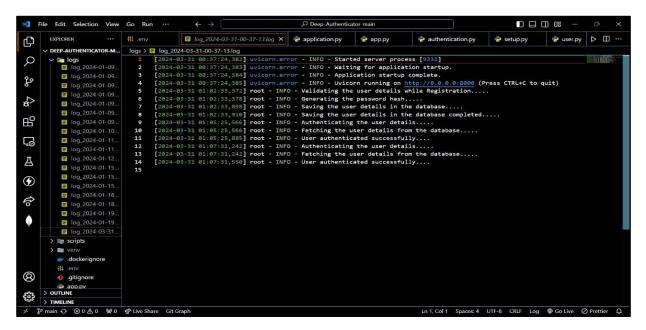


Figure 8: Results

VI. FUTURE SCOPE

The future scope of the project includes integrating multi-factor authentication methods, implementing continuous learning mechanisms, enabling real-time updates, extending mobile integration, ensuring scalability, enhancing privacy, customization, and cross-platform compatibility features, thereby evolving into a comprehensive and adaptable solution to address evolving security needs and technological advancements.

VII. CONCLUSION

In the facial recognition process, two key steps involve image capture and similarity assessment. Initially, the system captures images, either during registration or login, by activating the camera. Subsequently, these images undergo processing by the backend to create unique embeddings, which are stored in a database such as MongoDB. During login, a new image is captured by the camera and compared against the stored embeddings. The backend then computes the cosine similarity, and if a match is identified, the user is authenticated. This method ensures secure access through facial recognition technology, employing a two-step approach.

REFERENCES

- 1. Ning Zhang, Junmin Luo, Wuqi Gao. Research on Face Detection Technology Based on MTCNN. 2020 IEEE International Conference on Computer Network, Electronic and Automation (ICCNEA).
- Zaiye Yang, Wei Ge, Zheng Zhang. Face Recognition Based on MTCNN and Integrated Application of FaceNet and LBP Method. 2020 IEEE 2nd International Conference on Artificial Intelligence and Advanced Manufacture (AIAM).
- 3. Edwin Jose, Greeshma M., Mithun Haridas T. P., Supriya M. H. Face Recognition based Surveillance System Using FaceNet and MTCNN on Jetson TX2. 2019 IEEE 5th International Conference on Advanced Computing & Communication Systems (ICACCS).
- 4. Narayana Darapaneni, Aruna Kumari Evoori, Vijaya Bava Vemuri, Thangaselvi Arichandrapandian, Karthikeyan G, Anwesh Reddy Paduri, Dhivakar Babu, Jayadev Madhavan. Automatic Face Detection and Recognition for Attendance Maintenance. 2020 IEEE International Conference on Industrial and Information Systems (ICIIS).
- 5. Yaniv Taigman, Ming Yang, Marc'Aurelio Ranzato, Lior Wolf. DeepFace: Closing the Gap to Human-Level Performance in Face Verification. 2020 IEEE Conference on Computer Vision and Pattern Recognition.
- 6. Zhou Chun-rong. Research on Face Recognition Technology Based on Deep Learning. 2020 IEEE International Conference on Industrial Application of Artificial Intelligence (IAAI).



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305472 |

- 7. NehaCharandas Titre, Antara Bhattacharya. Access Data Privacy Management Control in MongoDB. 2018 IEEE international conference on system, computation, automation and networking (icscan).
- 8. Shizhen Huang, Haonan Luo. Attendance System Based on Dynamic Face Recognition. 2020 IEEE International Conference on Communications, Information System and Computer Engineering (CISCE).
- 9. Asep Hadian Sudrajat Ganidisastra, Yoanes Bandung. An Incremental Training on Deep Learning Face Recognition for MLearning Online Exam Proctoring. 2021 IEEE Asia Pacific Conference on Wireless and Mobile (APWiMob).
- 10. Petr Filip, Lukas Cegan. Comparison of MySQL and MongoDB with focus on performance. 2020 IEEE International Conference on Informatics, Multimedia, Cyber and Information System (ICIMCIS).
- 11. Ansh Abhay Balde, Abhay Jain, Dipti Patra. Improving Facial Recognition of FaceNet in a small dataset using DeepFakes. 2020 IEEE 4th International Conference on Computer, Communication and Signal Processing (ICCCSP).











INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY







📵 9940 572 462 🔕 6381 907 438 🔀 ijirset@gmail.com

